

277-480V LED Linear High Bay

Project:	
Type:	
Catalog#:	



Features

- High efficacy of 135 lm/W
- DLC 5.1 Premium qualified
- Low glare Type V distribution
- Available in 2-, 3-, 4- and 5-foot lengths
- IP66 rated, UL wet listed
- Designed for easy cleaning

Construction

- Heavy duty extruded aluminum chassis for superior thermal control and durability
- Die cast aluminum end caps and extruded polycarbonate lens are gasketed to the housing for protection against the elements
- Diffused lens reduces glare
- Mounting kits included - (2) ceiling anchors and 5' stainless steel aircraft cable kits with adjustable grippers and caribeaner type hooks

Description



The TGLIGHTS high voltage 277-480V LED Linear High Bay makes it easy to improve your lighting in high ceiling environments by eliminating the need for expensive step down transformers for your 347V or 480V building. The IP66 rating and UL wet listing makes them extremely versatile interior LED fixtures. It is an easy install compared to most high bays offering up to 27,000 lumens.

Specifications

Driver	Inventronics driver
Lumen Efficacy	135 lm/W
Wattage	80 W, 100 W, 120 W, 160 W, 200 W
CCT	4000K /5000K
CRI	Ra>80
Input Voltage	277-480 VAC
Operating Temp.	-30°C to 55°C (-22°F to 131°F)
Dimming	0-10V dimmable
Beam Angle	120°
Warranty	5 Years
Certification	FCC cUL UL DLC

Ordering Information

Model#	Wattage	Lumen	Length	Weight
T6000680W-HV	80 W	10800 lm	60 cm(23.6")	3.6 kg(7.9 lbs)
T60009100W-HV	100 W	13500 lm	90 cm(35.4")	5.1 kg(11.2 lbs)
T60012120W-HV	120 W	16200 lm	120 cm(47.2")	6.5 kg(14.3 lbs)
T60012160W-HV	160 W	21600 lm	120 cm(47.2")	6.5 kg(14.3 lbs)
T60015200W-HV	200 W	27000 lm	150 cm(59.1")	7.7 kg(17.0 lbs)

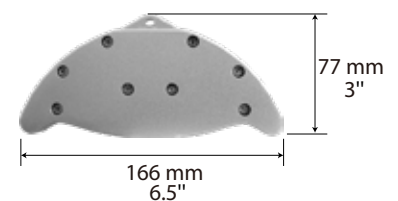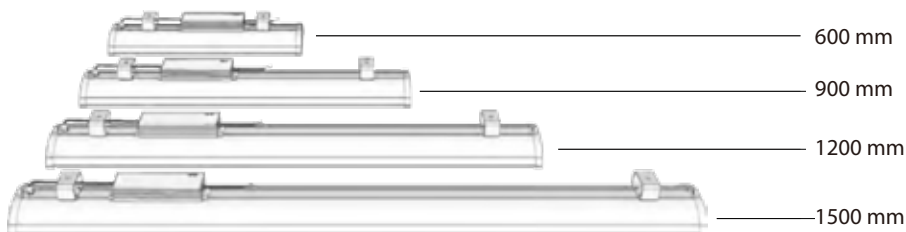

www.tglights.com

